



Attorney Docket No. 41781/44564
PATENT

NOV 27 2006

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Kurt SCHUNKE et al.

Serial No.: 10/565,025

Art Unit: Not yet assigned

Filed: January 18, 2006

Examiner: Not yet assigned

For: CONTROL UNIT

PRELIMINARY AMENDMENT

Mail Stop Patent Application
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Barnes & Thornburg Customer No:
23646
U.S. Patent and Trademark Office

Sir:

Please amend the subject application as shown in the attachment hereto.

Remarks begin on page 2 of this paper.

Substitute Specification begins on page 3 of this paper.

Marked-up copy of Substitute Specification begins on page 8 of this paper.

Amendments to the Claims begin on page 14 of this paper.

A Replacement Abstract begins on page 16 of this paper.

Amendments to the Drawings begin on page 17 of this paper.

Attorney Docket No. 41781/44564

Serial No.: 10/565,025

Page 2


REMARKS

This Preliminary Amendment is to clarify portions of the Application, including the Specification and Claims, to add a replacement Abstract of the Disclosure, to amend the Drawings and add a new Figure. Also included are a Substitute Specification, a marked-up copy of the Substitute Specification showing the changes made and an English-translation of the International Application. No new matter has been added.

The Application is now in condition for allowance, and such is respectfully requested.

It is respectfully requested that, if necessary to effect a timely response, this paper be considered as a Petition for an Extension of Time sufficient to effect a timely response and shortages in other fees, be charged, or any overpayment in fees be credited, to the Account of Barnes & Thornburg LLP, Deposit Account No. 02-1010 (41781/44564).

Respectfully submitted,

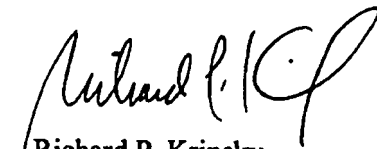

Richard P. Krinsky

Reg. No. 47,720

(202) 289-1313

BARNES & THORNBURG LLP

Suite 900

750 17th Street, N.W.

Washington, DC 20006-4607

Enclosures
RPK/cu



Attorney Docket No. 41781/44564

Serial No.: 10/565,025

Page 3

SUBSTITUTE SPECIFICATION**BACKGROUND AND SUMMARY**

[00001]

The present disclosure relates to a control unit for an electric motor, particularly for an electric motor of an actuator. The control unit is equipped with a control board and a capacitive energy storage device which can be charged by the supply network in order to supply power to the electric motor in the event of a power failure.

[00002]

The control unit is particularly suitable for the electric motors of actuators whose outputs are relatively low. Such actuators are used in the safety field, among other fields. The actuators are used, for example, in the event of developing smoke caused by a fire or in the case of a power failure or other emergencies, to move an actuator into a position optimal for a respective case, for example, in order to open or close a flap. Solutions are also known in which the movement into a safety position takes place by mechanical structural elements, such as springs. However, since these mechanical components remain without a function in the normal operation, they may not be operable when a safety situation occurs. Furthermore, it is disadvantageous that the structural element to be adjusted is moved by a purely mechanical drive into an end position which is not necessarily optimal. For the above-mentioned reasons, solutions such as electrical solutions are considered. However, since the possibility exists that the power supply for the electric motor has already failed when the safety function is needed, it is known to supply the electric motor by an auxiliary voltage source. Since the electric motors are d.c. motors, an auxiliary voltage source would offer one or more accumulators. However, these auxiliary voltage sources have the disadvantage that over time they discharge in an uncontrolled manner so that the energy still to be supplied will not be sufficient for starting the electric motor.

[00003]

It has therefore been suggested to use a capacitive storage device as an energy storage device which is charged from the power supply network. It is an advantage that

the full capacity or energy is always available. It is advantageous for this capacitive storage device to be fed from the circuit of the electric motor. In the case of a known control unit or in the case of a known safety circuit, the capacitive storage device is charged from the power supply network but, in the event that the electric motor has to be supplied from the storage device, a switch, preferably a relay, is switched. This also still results in an uncertainty since this switch or the relay is not operated in the normal operation, so that an operational check also would have to be carried out. In the case of capacitive energy storage devices, the intensity of the supplied current and thus also of the torque applied by the electric motor depends on the ambient temperature. When the electric motor is used for an actuator, depending on the usage case or site, the ambient temperatures fluctuate in a wide range, for example, between -25°C and $+25^{\circ}\text{C}$. At these indicated values, the torque to be applied at a temperature of -25°C amounts to only half the torque which would be applied at a temperature of $+25^{\circ}\text{C}$. However, since a certain torque is required, the capacitive energy storage device has to be designed for the lowest temperature, so that an overdimensioning takes place in many usage cases. In addition, the capacitive energy storage devices are subjected to an aging process. However, this aging process is accelerated, the higher the ambient temperature and the operational voltage. A service life is defined for the considered usages. So that this service life is achieved, care has to be taken that the operational voltage of the capacitive energy storage device will remain under its nominal voltage at temperatures in the upper range, so that the planned service life will be reached.

[00004]

The present disclosure is related to a control unit such that a temperature-dependent acceleration of the aging process or the reduction of the storage capacity of the capacitive energy storage device is effectively avoided. Furthermore, a length of operation is not decreased by an excess voltage.

Attorney Docket No. 41781/44564

Serial No.: 10/565,025

Page 5

[00005] An illustrative embodiment of the control unit of the present disclosure includes a sensor, or a sensor is assigned to the control unit, for determining the ambient temperature such that a measured temperature can be converted to control signals by a converter. Moreover, a charge voltage of a capacitive energy storage device can be controlled as a function of the temperature by a voltage converter.

[00006] The ambient temperature for an included electric motor is measured continuously. As a result, it is ensured that, at extremely low and also at extremely high temperatures, a continuously constant or approximately constant torque can be applied by the electric motor. That is because the operational voltage for the capacitive energy storage device, apart from slight fluctuations, is always constant. As a result, neither a temperature-dependent nor a voltage-dependent aging process is promoted. Therefore, the above-noted overdimensioning is eliminated since it can be assumed that the control unit is used in many different temperature ranges with extremely different temperatures. In addition, not only the defined service life of the capacity energy storage device is reached but the stored energy is also sufficient so that the electric motor will deliver a sufficient driving torque.

[00007] An implementation of voltage control can take place in multiple ways. Thus, the present disclosure provides that the operational voltage for the capacitive energy storage device can be controlled by a charge converter as a function of the temperature to a constant or approximately constant value. Constructively, the control unit is particularly simple but is also offers a high operational reliability if the capacitive energy storage device is constantly acted upon by its respective operational voltage. As a result, the charge condition becomes constant so that the electric motor can be supplied with current from the capacitive energy storage device at any time. The temperature sensor or temperature probe may be arranged outside the control unit. However, in an illustrative embodiment, it is provided that the temperature sensor is integrated in the control board.

As a result, lines to the control unit are avoided. Furthermore, the temperature sensor or temperature probe would be protected.

[00008] The capacitive energy converter should be arranged within the electrical circuit of the motor, because the lower motor voltage then has to be controlled. Normally, the electric motor is also acted upon by a direct safety current. The electric motor could then directly, if required, be acted upon by the voltage from the capacitive energy storage device. If the capacitive energy storage device is not acted upon by voltage from the motor circuit, it is provided that, if the electric motor is acted upon by voltage from the energy storage device, the voltage can be converted by a discharge converter.

[00009] Other aspects of the present disclosure will become apparent from the following descriptions when considered in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[00010] Figure 1 is a block diagram showing an embodiment of a control unit according to the present disclosure.

[00011] Figure 2 is a block diagram showing another embodiment of a control unit according to the present disclosure.

DETAILED DESCRIPTION

[00012] For reasons of a simple representation, Figure 1 shows a block diagram of a control unit 10. The control unit 10 includes a controller 11 into which values are fed which are measured by a temperature sensor 12 or a temperature probe. Temperature sensor 12 may be assigned to controller 11, as shown in Figure 1, or may be integrated in controller 11, as shown in Figure 2. As illustrated by the arrow A, the controller 11 is acted upon by a voltage. The intensity of the voltage may be a normal line voltage. A transformer and a rectifier may be installed in the controller 11 in order to convert a normal alternating (AC) voltage to a direct (DC) safety voltage. However, it is also conceivable that the transformer is mounted outside the controller 11, so that the direct safety voltage is fed

into the controller 11. Figure 1 shows two electric circuits leading from the controller 11, including a first electric circuit 16 acting upon an electric motor M and a second electric circuit or supply network 18 acting upon a capacitive energy storage device C. A charge converter 13 is also installed in the second electric circuit 18, which charge converter 13 controls or provides an outgoing current as a function of the temperature to either a constant or approximately constant value. As a result, the capacitive energy storage device C is always acted upon by the same or approximately the same charge voltage or operational voltage. The charge or operational voltage is therefore present at the energy storage device C. In the event of a power failure, the motor M is either directly acted upon from the capacitive energy storage device C, or the charge or operational voltage is, in addition, converted by a discharge converter or switch 14.

[00013] The controller 11 includes a control board 20 which may contain the temperature sensor 12 or the temperature probe.

[00014] The present disclosure is not limited to the illustrated embodiment. It is important that the ambient temperature of the electric motor M is determined and that the charge voltage of the capacitor C is always constant or approximately constant, even if the ambient temperatures fluctuate to an extreme degree or are different. For this purpose, the control unit 10 is equipped with charge converter 13.

[00015] Although the present disclosure has been described and illustrated in detail, it is to be clearly understood that this is done by way of illustration and example only and is not to be taken by way of limitation. The scope of the present disclosure is to be limited only by the terms of the appended claims.

MARKED-UP COPY

OF SUBSTITUTE SPECIFICATION

~~WO 2005/015707~~

~~PCT/EP2004/007548~~

~~CONTROL UNIT~~

BACKGROUND AND SUMMARY

[00001]

~~The invention~~ present disclosure relates to a control unit for an electric motor, particularly for an electric motor of an actuator, ~~which~~. The control unit is equipped with a control board and a capacitive energy storage device which can be charged by the supply network in order to supply power to the electric motor in the event of a power failure.

[00002]

~~The concerned~~ control unit is particularly suitable for the electric motors of actuators whose outputs are relatively low. Such actuators are used in the safety field, among other fields, ~~in order to~~. The actuators are used, for example, in the event of developing smoke caused by a fire [;] or in the case of a power failure or other emergencies, to move an actuator into a position still optimal for the a respective case, for example, in order to open or close a flap. Solutions are also known in which the movement into a safety position takes place by mechanical structural elements, such as springs. However, since these mechanical components remain without a function in the normal operation, they may not be operable when a safety situation occurs. Furthermore, it is disadvantageous that the structural element to be adjusted is moved by a purely mechanical drive into an end position which, ~~however~~, is not necessarily optimal. For the above-mentioned reasons, solutions are ~~therefore preferred which are to be considered~~ such as electrical solutions are considered. However, since the possibility exists that the power supply for the electric motor has already failed when the safety function is needed, it is known to supply the electric motor by ~~means of~~ an auxiliary voltage source. Since the electric motors are d.c. motors, an auxiliary voltage source would offer one or more

accumulators. However, these auxiliary voltage sources have the disadvantage that over time they discharge in an uncontrolled manner so that the energy still to be supplied will not be sufficient for starting the electric motor.

[00003]

It has therefore been suggested to use a capacitive storage device as an energy storage device which is charged from the power supply network. It is an advantage that the full capacity or energy is always available. It is particularly advantageous for this capacitive storage device to be fed from the circuit of the electric motor. In the case of a known control unit or in the case of a known safety circuit, the capacitive storage device is charged from the power supply network but, in the event that the electric motor has to be supplied from the storage device, a switch, preferably a relay, is switched. This also still results in an uncertainty since this switch or the relay is not operated in the normal operation, so that an operational check also would have to be carried out. In the case of capacitive energy storage devices, the intensity of the supplied current and thus also of the torque applied by the electric motor depends on the ambient temperature. When the electric motor is used for an actuator, depending on the usage case or site, the ambient temperatures fluctuate in a wide range, for example, between -25°C and $+25^{\circ}\text{C}$. At these indicated values, the torque to be applied at a temperature of -25°C amounts to only half the torque which would be applied at a temperature of $+25^{\circ}\text{C}$. However, since a certain torque is required, the capacitive energy storage device has to be designed for the lowest temperature, so that an overdimensioning takes place in many usage cases. In addition, the capacitive energy storage devices are subjected to an aging process. However, this aging process is accelerated, the higher the ambient temperature and the operational voltage. A service life is defined for the considered usages. So that this service life is achieved, care has to be taken that the operational voltage of the capacitive energy storage device will remain under its nominal voltage at temperatures in the upper range, so that the planned service life will be reached.

[00004] ~~The invention is based on the object of designing~~ present disclosure is related to a
control unit of the initially described type such that a temperature-dependent acceleration
of the aging process or the reduction of the storage capacity of the capacitive energy
storage device is effectively avoided, ~~in which case the~~. Furthermore, a length of
operation is not decreased by an excess voltage.

[00005] ~~The above object is achieved in that the~~ An illustrative embodiment of the control
unit is equipped with ~~of the present disclosure includes a sensor, or a sensor is assigned to~~
the control unit for determining the ambient temperature ~~or to which a sensor is assigned~~
such that ~~the respectively~~ a measured temperature can be converted to control signals by
~~means of a converter, and in that the~~. Moreover, a charge voltage of the ~~a~~ capacitive
energy storage device can be controlled as a function of the temperature by ~~means of a~~
voltage converter.

[00006] ~~The ambient temperature for the~~ an included electric motor is ~~now~~ measured
continuously. As a result, it is ensured that, at extremely low and also at extremely high
temperatures, a continuously constant or approximately constant torque can be applied by
the electric motor ~~since also~~. That is because the operational voltage for the capacitive
energy storage device, apart from slight fluctuations, is always constant. As a result,
neither a temperature-dependent nor a voltage-dependent aging process is promoted.
Therefore, ~~the previously necessary~~ above-noted overdimensioning is eliminated since it is
~~to can~~ be assumed that the ~~considered~~ control unit is used in many different temperature
ranges with extremely different temperatures. ~~By means of the above described~~
~~measures~~ In addition, not only the defined service life of the capacity energy storage device
is reached but the stored energy is also sufficient so that the electric motor will deliver a
sufficient driving torque.

[00007] ~~The~~ An implementation of the voltage control can take place in multiple
~~manner~~ ways. Thus, ~~it is provided~~ the present disclosure provides that the operational

voltage for the capacitive energy storage device can be controlled by means of a charge converter as a function of the temperature to a constant or approximately constant value. Constructively, the control unit is particularly simple but is also offers a high operational reliability if the capacitive energy storage device is constantly acted upon by its respective operational voltage. As a result, the charge condition becomes constant so that the electric motor can be supplied with current from the capacitive energy storage device at any time. The temperature sensor or temperature probe may be arranged outside the control unit. However, in a preferred an illustrative embodiment, it is provided that the temperature sensor is integrated in the control board. As a result, lines to the control unit are avoided. Furthermore, the temperature sensor or temperature probe would be protected.

[00008] The capacitive energy converter should ~~expediently~~ be arranged within the electrical circuit of the motor, because the lower motor voltage then has to be controlled. Normally, the ~~considered electric motors are~~ motor is also acted upon by means of a direct safety current. The electric motor could then directly, if required, be acted upon by the voltage from the capacitive energy storage device. If the capacitive energy storage device is not acted upon by means of voltage from the motor circuit, it is provided that, if the electric motor is acted upon by voltage from the energy storage device, the voltage can be converted by means of a discharge converter.

[00009] ~~The invention will be explained in detail by means of the attached drawing. Other aspects of the present disclosure will become apparent from the following descriptions when considered in conjunction with the accompanying drawings.~~

BRIEF DESCRIPTION OF THE DRAWINGS

[00010] Figure 1 is a ~~conceivable~~ block diagram for implementing the showing an embodiment of a control unit according to the invention present disclosure.

[00011] Figure 2 is a block diagram showing another embodiment of a control unit according to the present disclosure.

DETAILED DESCRIPTION

~~441000121~~ For reasons of a simpler ~~simple~~ representation, Figure 1 shows ~~only the~~ a block diagram because the used electrical and electronic components are known of a control unit 10. The control unit 10 is equipped with ~~includes~~ a device control ~~controller~~ 11 into which the values are fed which are measured by means of a temperature sensor 12 or a temperature probe. Temperature sensor 12 may be assigned to controller 11, as shown in Figure 1, or may be integrated in controller 11, as shown in Figure 2. As illustrated by the arrow A, the device control ~~controller~~ 11 is acted upon by means of a voltage. The intensity of the voltage may be the ~~a~~ normal line voltage, and a ~~A~~ transformer and a rectifier may be installed in the device control ~~controller~~ 11 in order to convert a normal alternating (AC) voltage to a direct (DC) safety voltage. However, it is also conceivable that the transformer is mounted outside the device control ~~controller~~ 11, so that the direct safety voltage is fed into the device control ~~controller~~ 11. The block diagram indicates that Figure 1 shows two electric circuits flow out of leading from the device control controller 11, specifically an including a first electric circuit for 16 acting upon the an electric motor M and another a second electric circuit for or supply network 18 acting upon the a capacitive energy storage device C. A charge converter 13 is also installed in this the second electric circuit and 18, which charge converter 13 controls the or provides an outgoing current as a function of the temperature to either a constant or approximately constant value. As a result, the capacitive energy storage device C is always acted upon by the same or approximately the same charge voltage or operational voltage. The charge or operational voltage is therefore present at the energy storage device C. In the event of a power failure, the motor M is either directly acted upon from the capacitive energy storage device C, or the charge or operational voltage is, in addition, converted by way of a discharge converter or switch 14.

Attorney Docket No. 41781/44564

Serial No.: 10/565,025

Page 13

~~424~~[00013] In a manner not shown in detail, the ~~The device control~~ controller 11 is equipped with ~~includes~~ a control board 20 which may also contain the temperature sensor 12 or the temperature probe.

[00014] The ~~invention~~ present disclosure is not limited to the illustrated embodiment. It is important that the ambient temperature of the electric motor M is determined and that the charge voltage of the capacitor C is always constant or approximately constant, even if the ambient temperatures fluctuate to an extreme degree or are different. For this purpose, the control unit 10 is also equipped with a charge converter 13.

[00015] Although the present disclosure has been described and illustrated in detail, it is to be clearly understood that this is done by way of illustration and example only and is not to be taken by way of limitation. The scope of the present disclosure is to be limited only by the terms of the appended claims.

WO 2005/015707

PCT/EP2004/007548

CLAIMS WE CLAIM:

1. ~~(Currently Amended) Control unit for an electric motor, particularly for an electric motor of an actuator, which is equipped with a control board and a capacitive energy storage device which can be charged by the supply network in order to supply power to the electric motor in the event of a power failure, characterized in that the control unit (10) is equipped with a sensor (12) for determining the ambient temperature or to which a corresponding sensor is assigned such that the respectively measured temperature can be converted by means of a converter into control signals, and in that the charge voltage of the capacitive energy storage device C can be controlled as a function of the temperature by means of a voltage converter (13).~~ A control unit for an electric motor of an actuator, the control unit comprising:

a controller;

a capacitive energy storage device chargeable by a supply network to supply power to the electric motor in the event of a power failure, the capacitive energy storage device having a charge voltage;

a temperature sensor assigned to the control unit to measure an ambient temperature; and

a charge converter configured to convert the measured ambient temperature into a control signal to control the charge voltage of the capacitive energy storage device as a function of the measured ambient temperature.

2. ~~(Currently Amended) Control~~ The control unit according to Claim 1,
~~characterized in that the~~ wherein an operational voltage for the capacitive energy storage device can be controlled by means of the a charge converter (13) as a function of the measured ambient temperature to a constant or an approximately constant value.

Attorney Docket No. 41781/44564

Serial No.: 10/565,025

Page 15

3. (Currently Amended) ~~Control~~ The control unit according to Claim 1 or 2, characterized in that wherein the capacitive energy storage device (13) ~~can be~~ is continuously acted upon by means of its respective the operational voltage.

4. (Currently Amended) ~~Control~~ The control unit according to one or more of the preceding Claims 1 to 3, characterized in that Claim 1, wherein the temperature sensor or the temperature probe is integrated in the ~~control board~~ controller of the control unit (10).

5. (Currently Amended) ~~Control~~ The control unit according to one or more of the preceding Claims 1 to 4, characterized in that Claim 1, wherein the capacitive energy storage device (13) ~~can be~~ is acted upon by electric energy from the ~~an~~ an electric motor circuit.

Attorney Docket No. 41781/44564

Serial No.: 10/565,025

Page 16

IN THE ABSTRACT:

Please replace the abstract with the following:

ABSTRACT OF THE DISCLOSURE

A control unit for an electric motor of an actuator. The control unit including a controller, a capacitive energy storage device having a charge voltage, a temperature sensor to measure an ambient temperature, and a charge converter.

Attorney Docket No. 41781/44564

Serial No.: 10/565,025

Page 17

IN THE DRAWING:

Please amend Figure 1 and add new Figure 2 as shown on the attached drawing sheets submitted as Replacement Sheets:

Figure 1: Add alpha designation "controller"; delete 1/1 sheet designation

Figure 2: New Figure

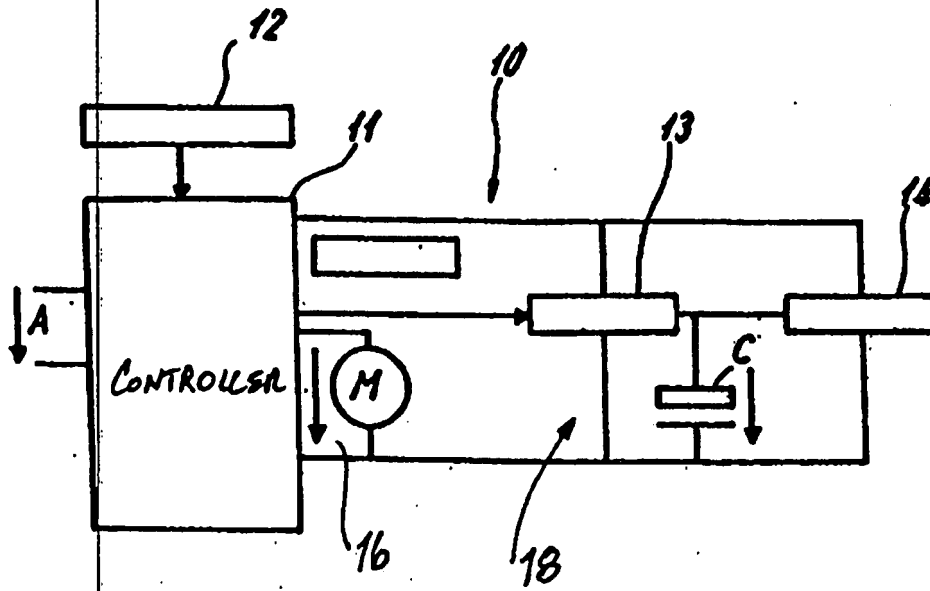


Fig. 1

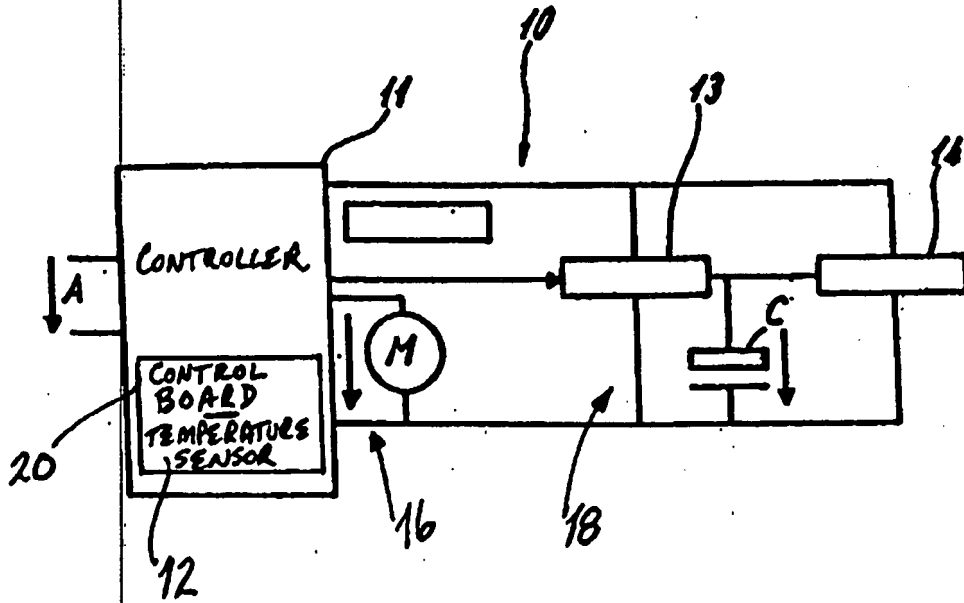


Fig. 2

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.